


PIX L

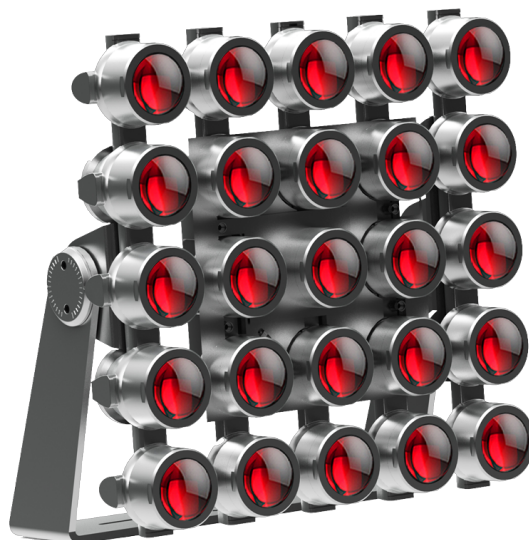

PIX is a new architectural outdoor matrix lighting series. 2 models all with the same aesthetic and fully customizable with multiple white and color variants, beam options, color finishes and accessories. All models are factory color calibrated for perfect consistency and can be monitored through our proprietary VMS (Virtual Monitoring System)

OPTICS

LED	25pcs
Output(10 °)	12200lm (Quad)
Full White LED (FW)	2700K, 3000K, 3500K, 4000K, 4500K ,5000K ,5700K , 6500K
Tuneable White LED (TW)	3000K-6500K
Multi Color (Quad)	RGBW
CRI(FW version)	90,80,70
LED life span	50,000hrs
Beam angle	5 ° ,10 ° ,12 ° ,15 ° ,25 ° ,30 ° ,60 ° , 15 ° x50 ° ,etc.
Dimming	linear 0-100%

MECHANICS

Dimension	500x315x515mm
Weight	19.9kgs
Lens material	PMMA + anti-UV lens

Housing material	anodized die cast aluminum
Finish	gray(RAL9006), black(RAL9005)
Mounting	floor, ceiling or wall mounting (with adjustable bracket)

ELECTRONICS

Power	420W
Power factor	>0.9
Components	integrated driver and power supply
Connector	power cable (IP65) +5 pin signal cable (IP65)
Operating voltage	AC100-277V,50/60Hz
Power supply	built-in
Optional electronic accessory	plug, leader cable


SOFTWARE

Control	DMX512 /RDM (wireless/DALI/ 0-10V available on request,optional for automatic address assignment)
DMX channel	FW(1ch/25chs),TW(2chs/50chs),RGBW(4chs/100chs)
VMS,CCS	optional


ENVIRONMENT

Ta	-20 to +45
Corrosion resistance	optional for marine environments
Passive cooling	die cast aluminum housing
Compliance	IK08,IP65,Class I
Certificate	CE, ETL, RoHS, CCC


OPTICS (Unit : cd/klm)

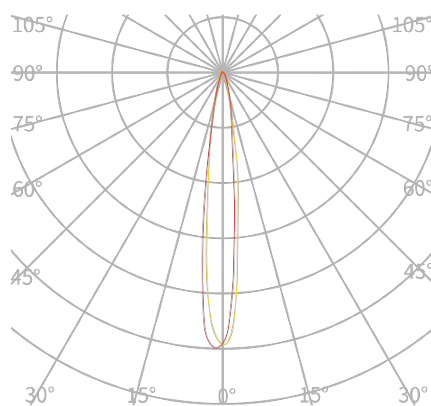


Narrow:12 °

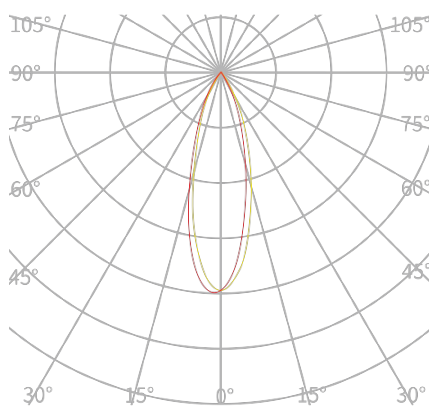

FLOOD:30 °

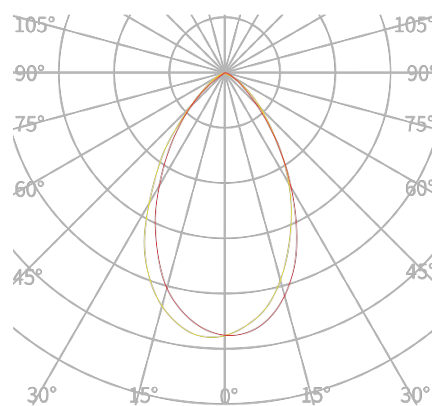

WIDE:60 °

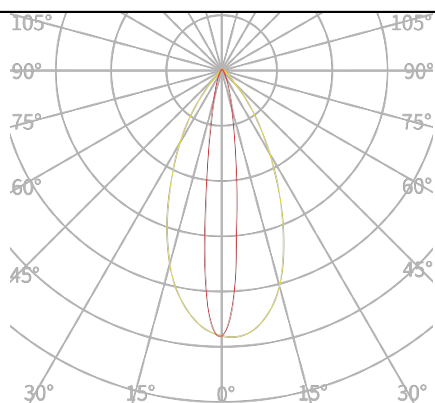

light shaping diffuser:15 ° × 50 °

PRODUCT DIMENSION

