


PIX S

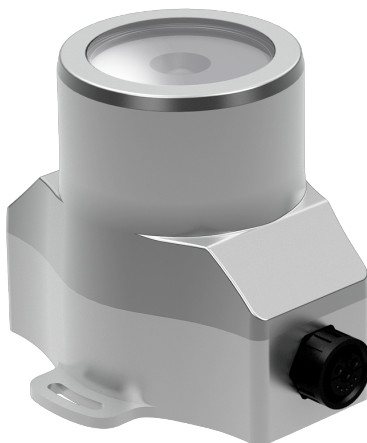

PIX is a new architectural outdoor matrix lighting series. 2 models all with the same aesthetic and fully customizable with multiple white and color variants, beam options, color finishes and accessories. All models are factory color calibrated for perfect consistency and can be monitored through our proprietary VMS (Virtual Monitoring System)

OPTICS

LED	1pc
Output(10 °)	300lm (TW) ,300lm (Quad)
Full White LED (FW)	2700K, 3000K, 3500K, 4000K, 4500K ,5000K ,5700K ,6500K
Tuneable White LED (TW)	3000K-6500K
Multi Color (Quad)	RGBW
CRI(FW version)	90,80,70
LED life span	50,000hrs
Beam angle	5 ° ,10 ° ,12 ° ,15 ° ,25 ° ,30 ° ,60 ° , 15 ° x50 ° ,etc.
Dimming	linear 0-100%

MECHANICS

Dimension	148x115x112mm
Weight	1kg
Lens material	PMMA + anti-UV lens

Housing material	anodized die cast aluminum
Finish	gray(RAL9006), black(RAL9005)
Mounting	floor, ceiling or wall mounting

ELECTRONICS

Power	12W
Power factor	>0.5
Components	integrated driver and power supply
Connector	8 pin power cable+DMX cable+IP68 connector
Operating voltage	AC100-240V,50/60Hz
Power supply	built-in
Optional electronic accessory	plug, leader cable


SOFTWARE

Control	DMX512 /RDM (wireless/DALI/ 0-10V available on request,optional for automatic address assignment)
DMX channel	FW(1ch),TW(2chs),RGBW(4chs)
VMS,CCS	optional

ENVIRONMENT

Ta	-20 to +45
Corrosion resistance	optional for marine environments
Passive cooling	die cast aluminum housing
Compliance	IK08,IP65,Class I
Certificate	CE, ETL, RoHS, CCC


OPTICS (Unit : cd/klm)

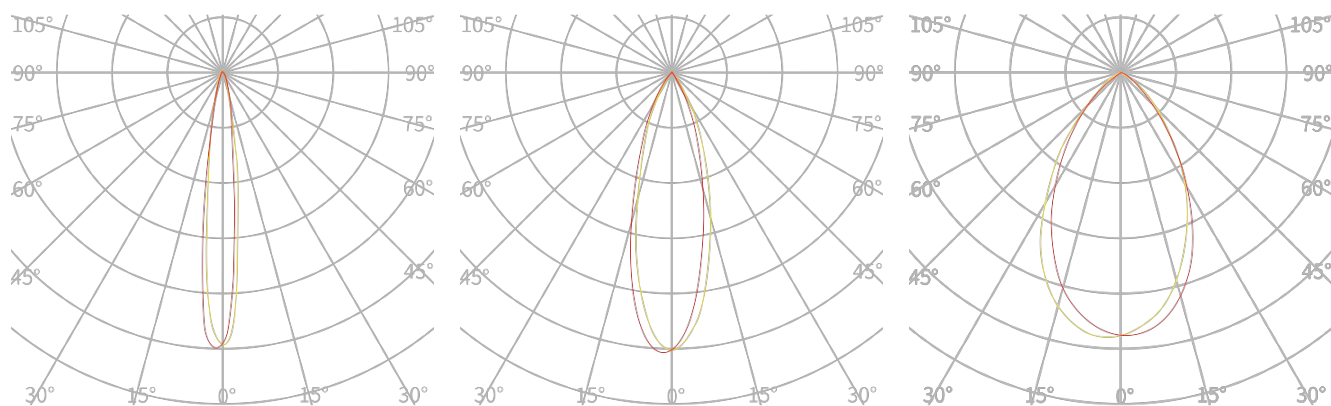

Narrow:12 °

FLOOD:30 °

WIDE:60 °

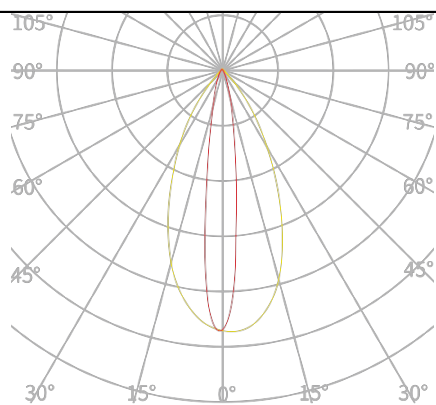

light shaping diffuser:15 ° × 50 °

PRODUCT DIMENSION

