

VIC S



VIC is a new architectural outdoor inground lighting series. 2 models all with the same aesthetic and fully customizable with multiple white and color variants, beam options, color finishes and accessories. All models are factory color calibrated for perfect consistency and can be monitored through our proprietary VMS (Virtual Monitoring System)

OPTICS

LED	12pcs/24pcs/48pcs
Output(10 ° ,1FT/ 2FT/4FT)	700lm/1600lm/3700lm(FW,CRI 80),800lm/1800lm/3400lm(TW),500lm/1100lm/2300lm(Qual)
Full White LED (FW)	2700K, 3000K, 3500K, 4000K, 4500K ,5000K, 5700K, 6500K
Tuneable White LED (TW)	3000K-6500K
Multi Color (Quad / Single)	RGBW
CRI(FW version)	90,80,70
LED life span	50,000hrs
Beam angle	10 ° , 15 ° , 25 ° , 30 ° , 60 ° , 15 ° x60 ° ,etc.
Dimming	linear 0-100%
Optional optical accessory	louvre

MECHANICS

Dimension	1FT/2FT/4FT
Weight(1FT/2FT/4FT)	2.51kgs/6.88kgs/13.6kgs
Lens material	PMMA
Housing material	anodized die cast aluminum
Finish	hard anodized gray
Mounting	Inground

ELECTRONICS

Power	20W/40W/80W
Power factor	>0.9
Components	integrated driver and power supply
Connector	8 pin power+DMX integrated cable + IP68 connector
Operating voltage	AC100-277V, 50/60Hz
Power supply	built-in
Optional electronic accessory	plug, leader cable, cable junction box


SOFTWARE

Control	DMX512 /RDM (wireless/DALI/ 0-10V available on request,optional for automatic address assignment)
DMX channel	1FT:FW(1ch),TW(3chs),RGBW(4chs);2FT:FW(1ch/2chs),TW(3chs/6chs),RGBW(4chs/8chs);4FT:FW(1ch/4chs),TW(3chs/12chs),RGBW(4chs/16chs)
VMS,CCS	optional

ENVIRONMENT

Ta	-20 to +45
Corrosion resistance	optional for marine environments
Passive cooling	die cast aluminum housing
Compliance	IK09,IP68,Class I
Certificate	CE, ETL, RoHS, CCC

OPTIONAL ACCESSORY

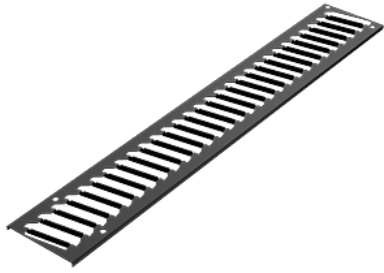

Louvre(VIC)



Cable Junction Box




Plug




Leader cable


OPTICS (Unit : cd/klm)

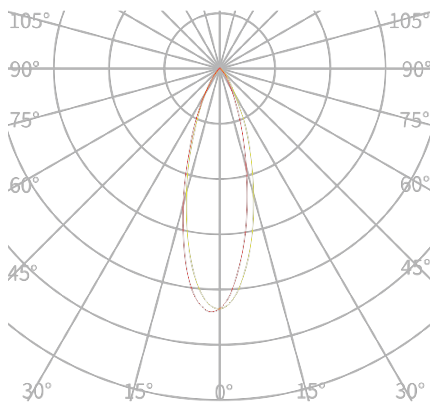

FLOOD:30 °

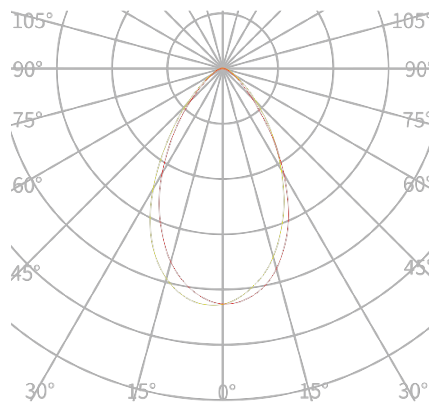

WIDE:60 °

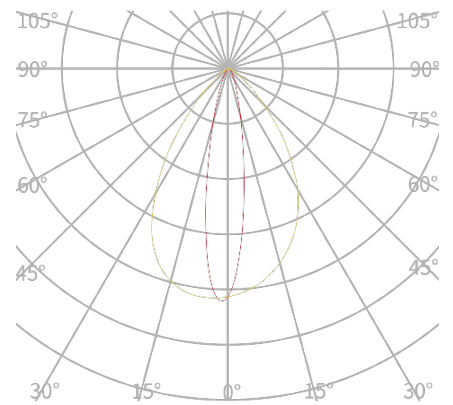

light shaping diffuser:15 ° × 60 °

PRODUCT DIMENSION

