


## PIX L

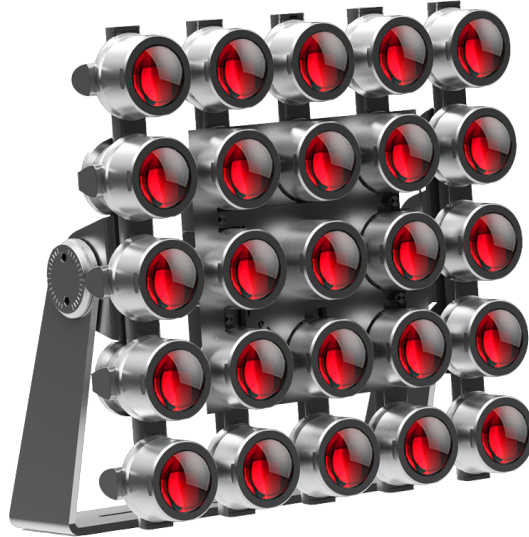

PIX is a new architectural outdoor matrix lighting series. 2 models all with the same aesthetic and fully customizable with multiple white and color variants, beam options, color finishes and accessories. All models are factory color calibrated for perfect consistency and can be monitored through our proprietary VMS (Virtual Monitoring System)

### OPTICS

LED	25pcs
Output(10 ° )	12200lm ( Quad )
Full White LED (FW)	2700K, 3000K, 3500K, 4000K, 4500K ,5000K ,5700K , 6500K
Tuneable White LED (TW)	3000K-6500K
Multi Color (Quad)	RGBW
CRI(FW version)	80
LED life span	50,000hrs
Beam angle	5 ° ,10 ° ,12 ° ,15 ° ,25 ° ,30 ° ,60 ° , 15 ° x50 ° ,etc.
Dimming	linear 0-100%

### MECHANICS

Lens material	PMMA + anti-UV lens
Housing material	anodized die cast aluminum
Finish	Gray(RAL9006), Black(RAL9005)

Mounting	floor, ceiling or wall mounting (with adjustable bracket)
Dimension	500 mm x 315 mm x 515 mm
Weight	19.9kgs

### ELECTRONICS

Power	420W
Power factor	>0.9
Components	integrated driver and power supply
Connector	power cable (IP65) +5 pin signal cable (IP65)
Operating voltage	100 to 277VAC,50/60Hz
Power supply	built-in
Optional electronic accessory	Leader cable, extension cable, cable junction box, terminator cap


### SOFTWARE

Control	DMX512 /RDM (wireless/DALI/ 0-10V available on request,optional for automatic address assignment)
DMX channel	FW(1ch/25chs),TW(2chs/50chs),RGBW(4chs/100chs)
VMS,CCS	optional

### ENVIRONMENT

Ta	-20 to +45
Corrosion resistance	optional for marine environments
Passive cooling	die cast aluminum housing
Compliance	IK08,IP65,Class I
Certificate	CE, ROHS


### OPTICS ( Unit : cd/klm )

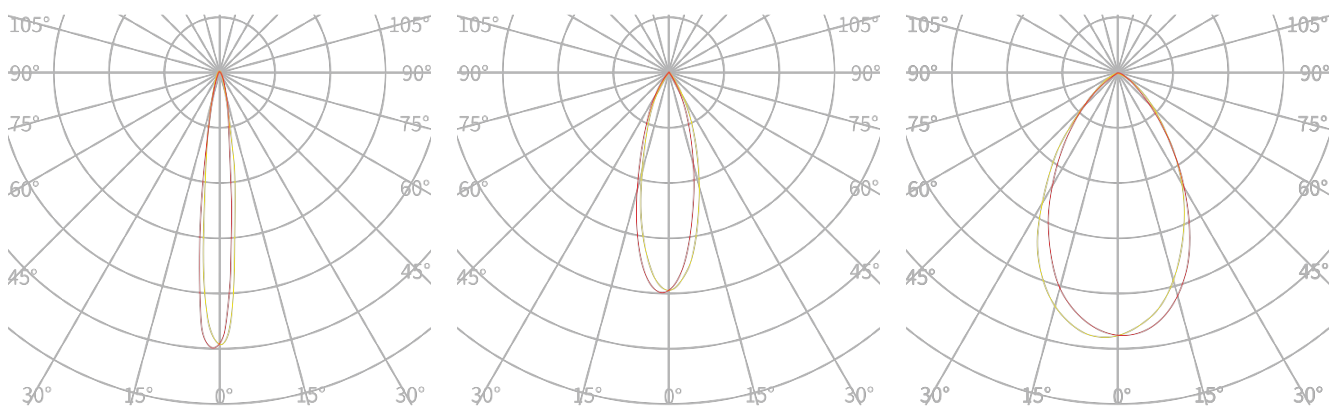

Narrow:12 °

FLOOD:30 °

WIDE:60 °

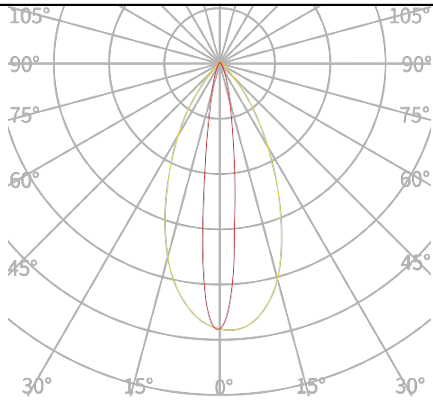

light shaping diffuser: 15 ° × 50 °

### PRODUCT DIMENSION

